




MACHINING FORM

CUSTOMER _____ PAGE _____ OF _____
 P. O. NUMBER _____ DATE _____
 DRAWN BY _____

HINGE

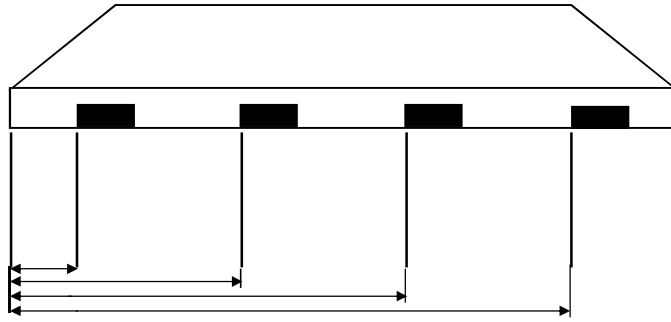

HINGES

SIZE _____
 BACKSET _____
 THICKNESS _____
 PIVOT _____
 TEMPLATE NO. _____


HINGE CORNERS

- 1/4" Radius
- 5/8" Radius
- Square

3 degree BEVELS

- Lock Edge
- Hinge Edge

ACTIVE

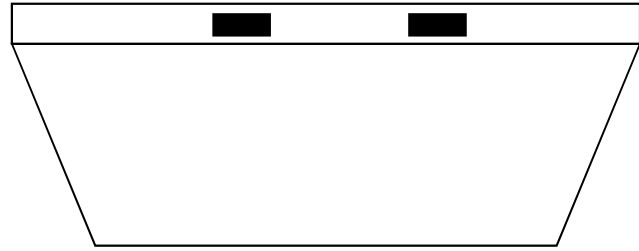

C-L DEAD LOCK

C-L LOCK FRONT

LOCKS / EXIT DEVICES

BORED LOCK _____ DEAD LOCK _____
 FACE BORE _____
 BOLT BORE _____
 BACKSET _____
 F-P THICKNESS _____
 F-PLATE WIDTH _____
 F-P HEIGHT _____

CORNERS


- 1/4" Radius
- 5/8" Radius
- Square

MORTISE LOCK _____
 CARD LOCK _____
 EXIT DEVICE _____

MANUFACTURER _____
 TEMPLATE NO. _____
 FUNCTION NO. _____

NOTE: * EXIT DEVICE BACK-SET SHALL BE GIVEN AS THE DISTANCE FROM C-L OF DEVICE TO C-L OF DOOR THICKNESS AT LOCK STILE UNLESS OTHERWISE NOTED.

INACTIVE

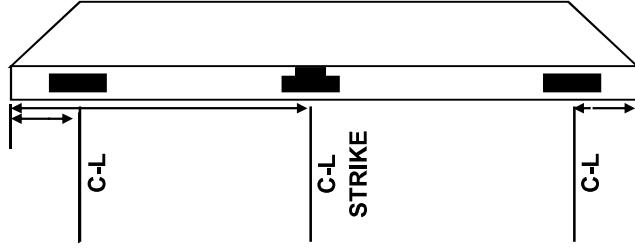

STRIKES

- 1-1/4 X 4-7/8" ASA
- 1-1/8 X 2-3/4" LIP
- 1-1/8 X 2-3/4" D-BOLT

DUSTBOX

OTHER _____
 MFG. _____
 TEMP. _____

FLUSH BOLTS

MFG. _____
 TEMP. NO. _____
 CORNER PRE _____

3 degree BEVELS

- Lock Edge
- Hinge Edge

SPEC. NO.

SPEC. NO.